

CoolLight™



Shutter Details

- Manufactured from 1.8mm thick aluminium interior panel and a 1.5mm thick UPVC exterior panel
- Styrofoam blocks secured between the panels utilising double sided adhesive tapes
- Interseal fitted between each panel
- 25mm sealed rollers with nylon tyre
- Roller holders manufactured from ABS plastic
- All fixings, except taptite screws and inserts, are stainless steel

Product Features

- Smooth/quiet operation
- Significant weight advantage compared with conventional 'cold' shutters
- Easily assembled/disassembled using clip together continuous hinge panels
- Easy change rollers



Mobile Doors
incorporating G-Rail



CoolLight


CoolLight



CoolLight™

Lock options

- Mini Maxi as standard (mini 77 style)
- Slam Lock S with Yale cylinder
- Slam Lock S with WBH cylinder
- Slam Lock S with twist knob

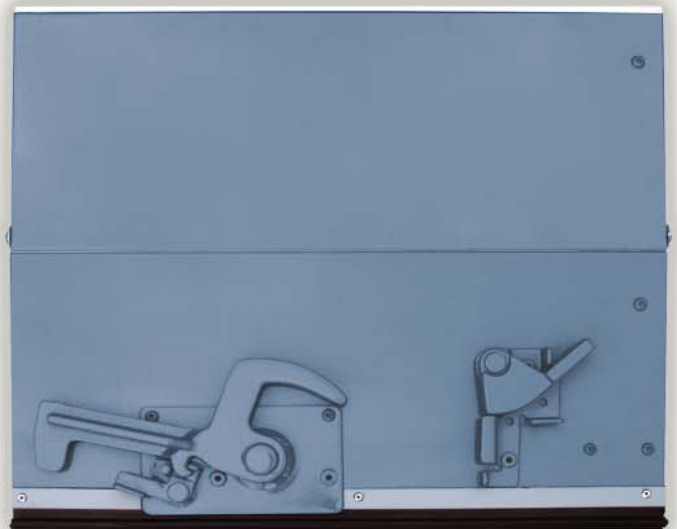

Innovation on the Move

J R Industries Ltd

Caxton Place, Pentwyn,
Cardiff, CF23 8XN,
United Kingdom.

Tel: +44 (0) 29 2054 9966
Fax: +44 (0) 29 2054 9046



Q05815

All products produced by J R Industries Ltd carry ISO 9001/2000 quality accreditation gained in December 1988.

www.jrindustries.co.uk